



# Kingfisher Lighting

Part of the LUCECO group of companies

## Datasheet

### OSLO Spot



### Specification Text

The OSLO Spot shall be manufactured from high-pressure die-cast aluminium and powder coated with a graphite grey marine grade finish. It shall have a power output of 16 - 21W, with an efficacy from 83lm/W. It shall deliver 1230 – 1680 luminaire lumens. The OSLO shall create a comfortable low glare illumination with distributions to suit pathways, urban areas and locations requiring accent lighting . It shall have a fully programmable DALI driver. The luminaire shall come in 2700K, 3000K and 4000K and be IK07 and IP66 rated and is appropriate for collar fixing.

### Specification

Weight:	4.5 kg
Material:	Aluminium
Paint Finish:	Graphite Grey


### Product Description

The versatile luminaire with endless possibilities, OSLO is the ideal solution for accent lighting.

### Key Features

- 16.0W - 21.0W
- 1,230 – 1,680 Luminaire Lumens
- Efficacy up to 83 lm/W
- 2700K, 3000K, 4000K, CRI>70
- IP66, IK07
- Lifetime 100,000, L90
- Adjustable Fixing

### Optics

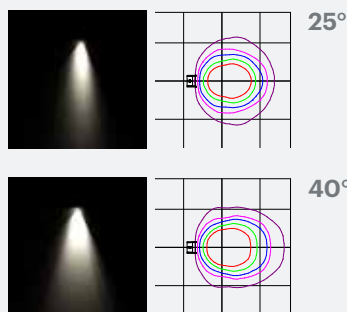


## Other Options Available

Contact for further details

- Colour Temperature Options

Body Type	A	B	C
Standard	460	200	60/76


All measurements in mm

## Mounting Options

- AC Collar Mount 76mm

## Dimming Options

- Constant Light Output
- Programmable
- Part Night Dimming
- Step Dimming

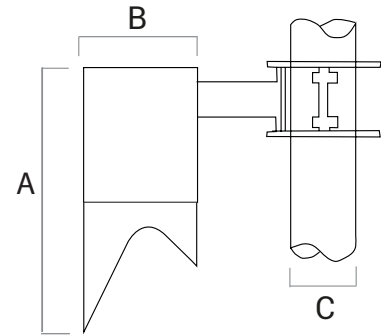

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
OSL-SP25-4.5-1F	16.0	1,330	525	25°	4000	IP66	IK07	4.5	Yes	DALI
OSL-SP25-4.7-1F	21.0	1,680	700		4000	IP66	IK07	4.5	Yes	DALI
OSL-SP40-4.5-1F	16.0	1,230	525	40°	4000	IP66	IK07	4.5	Yes	DALI
OSL-SP40-4.7-1F	21.0	1,550	700		4000	IP66	IK07	4.5	Yes	DALI