



Kingfisher Lighting

Part of the LUCECO group of companies

Datasheet

PANTHEON 2




Specification Text

The PANTHEON shall be manufactured from die-cast aluminium and powder coated with a graphite grey or aluminium silver finish. It shall have a power output ranging between 41 - 79W, with an efficacy of up to 111 lm/W. The luminaire shall deliver 3,450 - 8,800 luminaire lumens. The PANTHEON has a range of beam angles to suit a variety of projects. Available in 3000K or 4000K, the luminaire shall be IK08 and IP67 rated.

Specification

Weight:	9.7 kg
Windage:	0.09 m ²
Material:	Die-cast Aluminium
Paint Finish:	Aluminium Silver

Optics

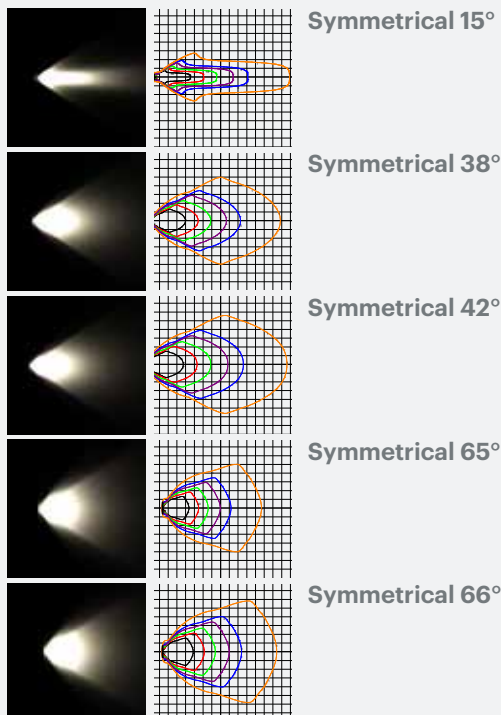

Product Description

The powerful flood light is available in an array of optics and versatile mounting options to deliver different lighting effects.

Key Features

- 41.0W - 79.0W
- 3,450 - 8,800 Luminaire Lumens
- Efficacy up to 111 lm/W
- 3000K, 4000K, CRI >70, 80
- IP67, IK08
- Lifetime 60,000, L80

5 YEARS WARRANTY		60,000 hrs LIFETIME	

Other Options Available

Contact for further details


- Colour Temperature Opportunities

Mounting Options

- Stirrup Mount

Body Type	A	B	C
Standard	418	316	425

All measurements in mm

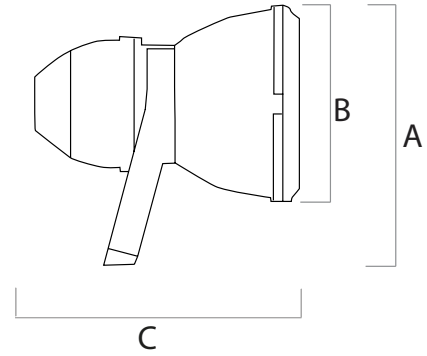

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
PAN2-SY15-840-79-21	79.0	8,800	-	Symmetrical 15°	4000	IP66	IK08	9.7	Yes	Fixed
PAN2-SY38-840-41-21	41.0	4,000	-	Symmetrical 38°	4000	IP66	IK08	9.7	Yes	Fixed
PAN2-SY42-840-79-21	79.0	7,900	-	Symmetrical 42°	4000	IP65	IK08	9.7	Yes	Fixed
PAN2-SY65-840-41-21	41.0	3,450	-	Symmetrical 65°	4000	IP68	IK08	9.7	Yes	Fixed
PAN2-SY66-840-79-21	79.0	6,900	-	Symmetrical 66°	4000	IP66	IK10	9.7	Yes	Fixed