

Datasheet

Tauri



Product Description

With its symmetrical distribution and modern looks, Tauri is made for the urban and out of town landscape. With two optics and a range of lamp and gear types, including LED, Tauri is flexible and practical


Specification Text

The luminaire shall be manufactured from high-pressure Polycarbonate. It shall have an LED efficacy of up to 71.0 lm/W and will be capable of producing up to 3,905 luminaire lumens at 4000K with a CRI >70. It shall have an asymmetric forward throw optic and is rated at IP66 and IK09.

Specification

Weight: 5.9 - 6.0kg
 Windage: 0.15m²
 Material: Polycarbonate
 Paint finish: RAL7016 Anthracite Grey Finish

Optics




Symmetrical

Key Features

- 35.0 - 55.0W
- 2,487 - 3,905 Luminaire Lumens
- Efficacy up to 71.0 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr, L90



Dimensions

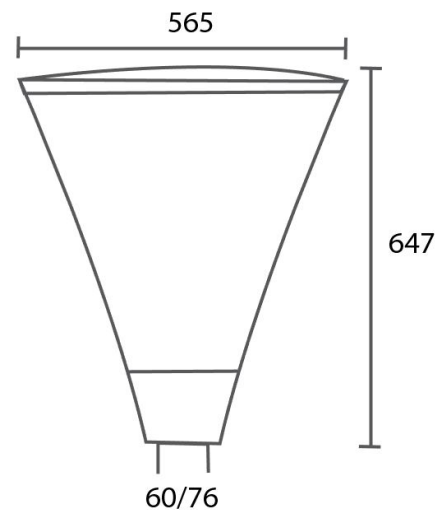

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included	Driver Type
TAU35F	35.0	2,487	700	Symmetrical	4000	IP66	IK09	5.9	RAL7016 Anthracite Grey Finish	Driver inc	Fixed
TAU35PEC	35.0	2,487	700		4000	IP66	IK09	6.0	RAL7016 Anthracite Grey Finish	Driver inc	Fixed
TAU55F	55.0	3,905	1050		4000	IP66	IK09	5.9	RAL7016 Anthracite Grey Finish	Driver inc	Fixed
TAU55PEC	55.0	3,905	1050		4000	IP66	IK09	6.0	RAL7016 Anthracite Grey Finish	Driver inc	Fixed



Accessories & Options

Mounting Options

- Post Top 60-76mm
[Contact for details](#)

Other Options

- Colour Temperature Option
- Photocell Option
[Contact for details](#)