



Kingfisher Lighting

Part of the LUCECO, group of companies

Datasheet



VILLA II


Specification Text

The VILLA II shall be manufactured from high pressure die-cast aluminium and be powder coated with a RAL 9005 Jet Black Finish. It shall have a power output ranging from 30 – 60W with an efficacy of 130.0 lm/W. It shall produce 3,588 - 7,270 luminaire lumens. Available in 2700K and 4000K, VILLA II is rated at IP66 and IK08.

Specification

Weight:	10.7 - 10.8 kg
Windage:	0.35 m ²
Material:	Die-cast Aluminium
Paint Finish:	RAL 9005 Jet Black Finish
Embodied Carbon:	126 - 128 kg CO ₂ e

Optics



Symmetrical 127°

Product Description

With a traditional heritage look, VILLA II is the amenity lantern with varying colour temperatures and outputs to promote high efficiency for many sites.



Key Features

- 30.0W - 60.0W
- 3,588 - 7,270 Luminaire Lumens
- Efficacy up to 130.0 lm/W
- 2700K, 4000K, CRI>70
- IP66, IK08
- Lifetime > 100,000hr, L80
- Dim to Warm Options
- Comfort Options
- 3 Hour Integral Emergency

IP66	IK08	100,000 hrs LIFETIME	5 YEARS WARRANTY
EM	PEC	2700K	4000K

Circular Economy Score	
0 to 0.05	Very poor circular economy performance
0.5 to 1.5	Some circular economy functionality
1.5 to 2.5	Definite/substantial progress to circularity
2.5 to 4.0	Excellent circularity

Other Options Available

Contact for further details

- Photocell Option
- 3 Hour Integral Emergency
- Colour Temperature Opportunities


Mounting Options

- Post Top 60mm

Dimensions

Body Type	A	B	C	D
Standard	816	425	425	60

All measurements in mm

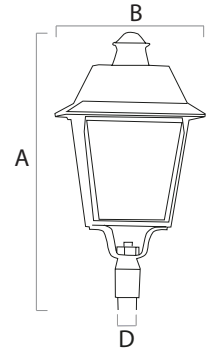

Code	Power (W)	Luminaire Lumens (lm)	Drive Current (mA)	Inrush Current (A pk)	Optic	CCT (K)	IP	IK	Weight (kg)	Driver Included	Driver Type
VIL30D-02	30.0	3,900	780	24.9	Symmetrical 127°	4000	IP66	IK08	10.7	Yes	DALI
VIL30D27K-02	30.0	3,588	780	24.9		2700	IP66	IK08	10.7	Yes	DALI
VIL60D-02	60.0	7,270	610	32.0		4000	IP66	IK08	10.7	Yes	DALI
VIL60D27K-02	60.0	6,688	610	32.0		2700	IP66	IK08	10.7	Yes	DALI