



Kingfisher Lighting

Part of the LUCECO group of companies

Datasheet



QUADRIO 180




Specification Text

The QUADRIO Bollard shall be manufactured from with a die-cast aluminium body with an extruded aluminium pole. It shall be powder coated with a graphite grey or aluminium silver finish. It shall have a power output ranging between 27.0W - 37.0W, with an efficacy up to 64 lm/W. It shall produce 1,650 - 2,350 luminaire lumens. The QUADRIO bollard has a radial distribution. The luminaire shall come in 3000K and 4000K and be rated IK07 and IP66 with an 1000mm height available.

Specification

Weight:	10.1 - 10.3 kg
Windage:	0.18 m ²
Material:	Die-cast Aluminium
Paint Finish:	Graphite Grey

Optics

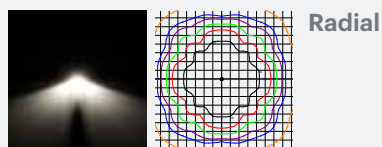

Product Description

Available with both comfort and performance outputs, QUADRIO is the square bollard bringing sophistication to your scheme.

Key Features

- 27.0W - 37.0W
- 1,650 - 2,350 Luminaire Lumens
- Efficacy up to 64 lm/W
- 3000K, 4000K, CRI>80
- IP66, IK07, IK10
- Lifetime 60,000, L80
- Height Options Available

IP66	IK07	IK10	Colour Temperature
5 YEARS WARRANTY	60,000 hrs LIFETIME		

Other Options Available

Contact for further details

- Colour Temperature Opportunities

Mounting Options

- Flange Mount

Body Type	A	B	C
Standard 1M	180	180	1,000

All measurements in mm



Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
QUA180P-SYR-840-37-16	37.0	2,350	700	Radial	4000	IP66	IK07	10.3	Yes	Fixed
QUA180C-SYR-840-27-16	27.0	1,650	700		4000	IP66	IK10	10.1	Yes	Fixed