



# Kingfisher Lighting

Part of the LUCECO group of companies

## Datasheet

### STYLO



### Specification Text

The STYLO shall be manufactured from highpressure die-cast aluminium. It shall be powder coated with a graphite grey marine grade finish. It shall have a power output ranging between 16 - 150W, with an efficacy from of up to 135 lm/W. It shall produce 1,880 - 19,040 luminaire lumens. The STYLO shall utilise reflector-based optics to create a comfortable low glare illumination with distributions to suit pathways, roadways, and open areas such as carparks. It shall have a fully programmable DALI driver. The luminaire shall come in 2700K, 3000K and 4000K and be rated IK08 and IP66. It shall have post top and side entry mounting options. The STYLO is a functional and aesthetically pleasing product, perfectly suited to a range of different projects.

### Specification

Weight:	11.5 kg
Material:	Die-cast Aluminium
Paint Finish:	Graphite Grey


### Product Description

This award-winning luminaire is the perfect demonstration of sleek Italian design. Using reflector-based technology the STYLO offers excellent efficiency without compromising on performance.



### Key Features

- 16.0W - 132.0W
- 1,880 - 19,040 Luminaire Lumens
- Efficacy up to 135 lm/W
- 2700K, 3000K, 4000K, CRI>70
- IP66, IK08
- Lifetime 100,000, L90

### Optics



**Street Optic (SV)**  
Asymmetrical narrow optic for narrow urban streets and highway entrances and exits



**Street Optic (STE-M)**  
Asymmetrical optic suitable for suburban areas

IP66	IK08	Marine Grade Finish	100,000 hrs LIFETIME	Colour Temperature
5 YEARS WARRANTY				Control Compatible

## Other Options Available

Contact for further details

- Colour Temperature Options

## Mounting Options


- Side Entry 42-60mm

## Dimming Options

- Constant Light Output
- Programmable
- Part Night Dimming
- Step Dimming

Body Type	A	B	C
Standard	1228	250	107

All measurements in mm

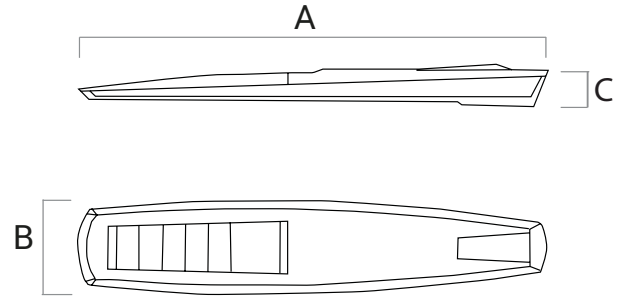

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
STY-SO5-4.5-1M1F	16.0	1,880	525	Street Optic (SO5)	4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.7-1M1F	21.5	2,420	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.5-2M1F	30.5	3,690	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.7-2M1F	40.0	4,720	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.5-3M1F	44.0	5,530	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.7-3M1F	58.0	7,030	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.5-4M1F	57.0	7,150	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.7-4M1F	76.0	8,990	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.5-5M1F	72.0	9,430	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.7-5M1F	95.0	11,890	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.5-6M1F	85.0	11,110	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.7-6M1F	114.0	14,070	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.5-7M1F	99.0	12,920	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SO5-4.7-7M1F	132.0	16,290	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.5-1M1F	16.0	1,880	525	Street Optic (SV)	4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.7-1M1F	21.5	2,420	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.5-2M1F	30.5	3,690	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.7-2M1F	40.0	4,720	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.5-3M1F	44.0	5,530	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.7-3M1F	58.0	7,030	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.5-4M1F	57.0	7,150	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.7-4M1F	76.0	8,990	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.5-5M1F	72.0	9,430	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.7-5M1F	95.0	11,890	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.5-6M1F	85.0	11,110	525		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.7-6M1F	114.0	14,070	700		4000	IP66	IK08	11.5	Yes	DALI
STY-SV-4.5-7M1F	99.0	12,920	525		4000	IP66	IK08	11.5	Yes	DALI

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
STY-STE-M4.5-1M1F	21.5	2,610	700		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.7-1M1F	28.0	3,270	525		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.5-2M1F	39.0	5,160	700		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.7-2M1F	52.0	6,530	525		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.5-3M1F	57.0	7,490	700		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.7-3M1F	76.0	9,420	525	Street Optic (STE-M)	4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.5-4M1F	76.0	9,950	700		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.7-4M1F	102.0	12,550	525		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.5-5M1F	95.0	12,720	700		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.7-5M1F	127.0	15,950	525		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.5-6M1F	112.0	15,170	700		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.7-6M1F	150.0	19,040	525		4000	IP66	IK08	11.5	Yes	DALI
STY-STE-M4.5-7M1F	131.0	17,590	700		4000	IP66	IK08	11.5	Yes	DALI